

VUEPOINT™

Assembly Instructions for Model: FPM55

Thank you for choosing a VUEPOINT™ wall mount. The FPM55 is designed to mount up to 55 inch LCD TVs weighing less than 80 lbs (36.3 Kg) to a vertical wall. It will allow you to effortlessly tilt the TV $\pm 20^\circ$


⚠CAUTION: The size and weight of your television must not exceed 55 inches (140 cm) diagonally and 80 Lbs (36.3 Kg). The wall must be capable of supporting five times the weight of the television plus the wall mount. Never use defective parts. Improper installation may cause property damage or personal injury. Do not use this product for any purpose that is not explicitly specified by CSAV.

If you do not understand these directions, or have any doubts about the safety of the installation, please call a qualified contractor or contact CSAV at 1-888-333-1376 or www.vuepointav.com. Our customer service representatives can quickly assist you with installation questions and missing or damaged parts. Replacement parts for products purchased through authorized dealers will be shipped directly to you. Check carefully to make sure that there are no missing or defective parts. CSAV can not be liable for damage or injury caused by incorrect mounting, incorrect assembly, or incorrect use. Please call CSAV before returning products to the point of purchase


NOTE: The supplied wall mounting hardware is not for metal stud or old cinder block walls. If you are uncertain about the nature of your wall, consult an installation contractor. CSAV makes every effort to assure all necessary television mounting hardware is included. If the hardware you need is not included please consult your local hardware store or call CSAV.

Required Tools: Drill, 3/16" drill bit, (1/2" masonry bit for concrete, or concrete block installations), wrench set, phillips screw driver


Supplied Parts and Hardware: (All threaded fasteners are shown full size.)




Wall Plate - A
Qty. 1




Left Monitor Bracket - B
Qty. 1




Right Monitor Bracket - C
Qty. 1



Lag Bolt - D
Qty. 3




Lag Bolt Washer - E
Qty. 3




Concrete Anchor - F
Qty. 3




M4 x 12 mm Bolt - G
Qty. 4




M5 x 12 mm Bolt - H
Qty. 4




M6 x 12 mm Bolt - I
Qty. 4



M4 x 30 mm Bolt - J
Qty. 4



M5 x 30 mm Bolt - K
Qty. 4



M6 x 35 mm Bolt - L
Qty. 4




M4 Lock Washer - M
Qty. 4




M5 Lock Washer - N
Qty. 4




M6 Lock Washer - O
Qty. 4




M4 / M5
M4/M5 Washer - P
Qty. 4



M6 / M8
M6 Washer - Q
Qty. 4



M4 / M5
M4/M5 Spacer - R
Qty. 4



M6 / M8
M6 Spacer - S
Qty. 4

Step 1: Mount Monitor Brackets to a television with a flat back

NOTE: For televisions with a curved back, or an obstruction near the threaded insert see Step 2.


Determine the diameter of the Bolt (G,H,I) your TV requires by hand threading them into the threaded insert on the back of the TV. If you encounter any resistance stop immediately.

Once you have determined the correct diameter, see the appropriate Diagram below, thread the Bolt through the appropriate Lock Washer (M,N,O), corresponding Washer (P,Q), Monitor Bracket (B,C), and finally into the TV.

Make sure the Monitor Brackets (B,C) are vertically centered and level with each other.

Tighten the Bolts (G,H,I) securing the Monitor Brackets (B,C) to the monitor.

Diagram 1

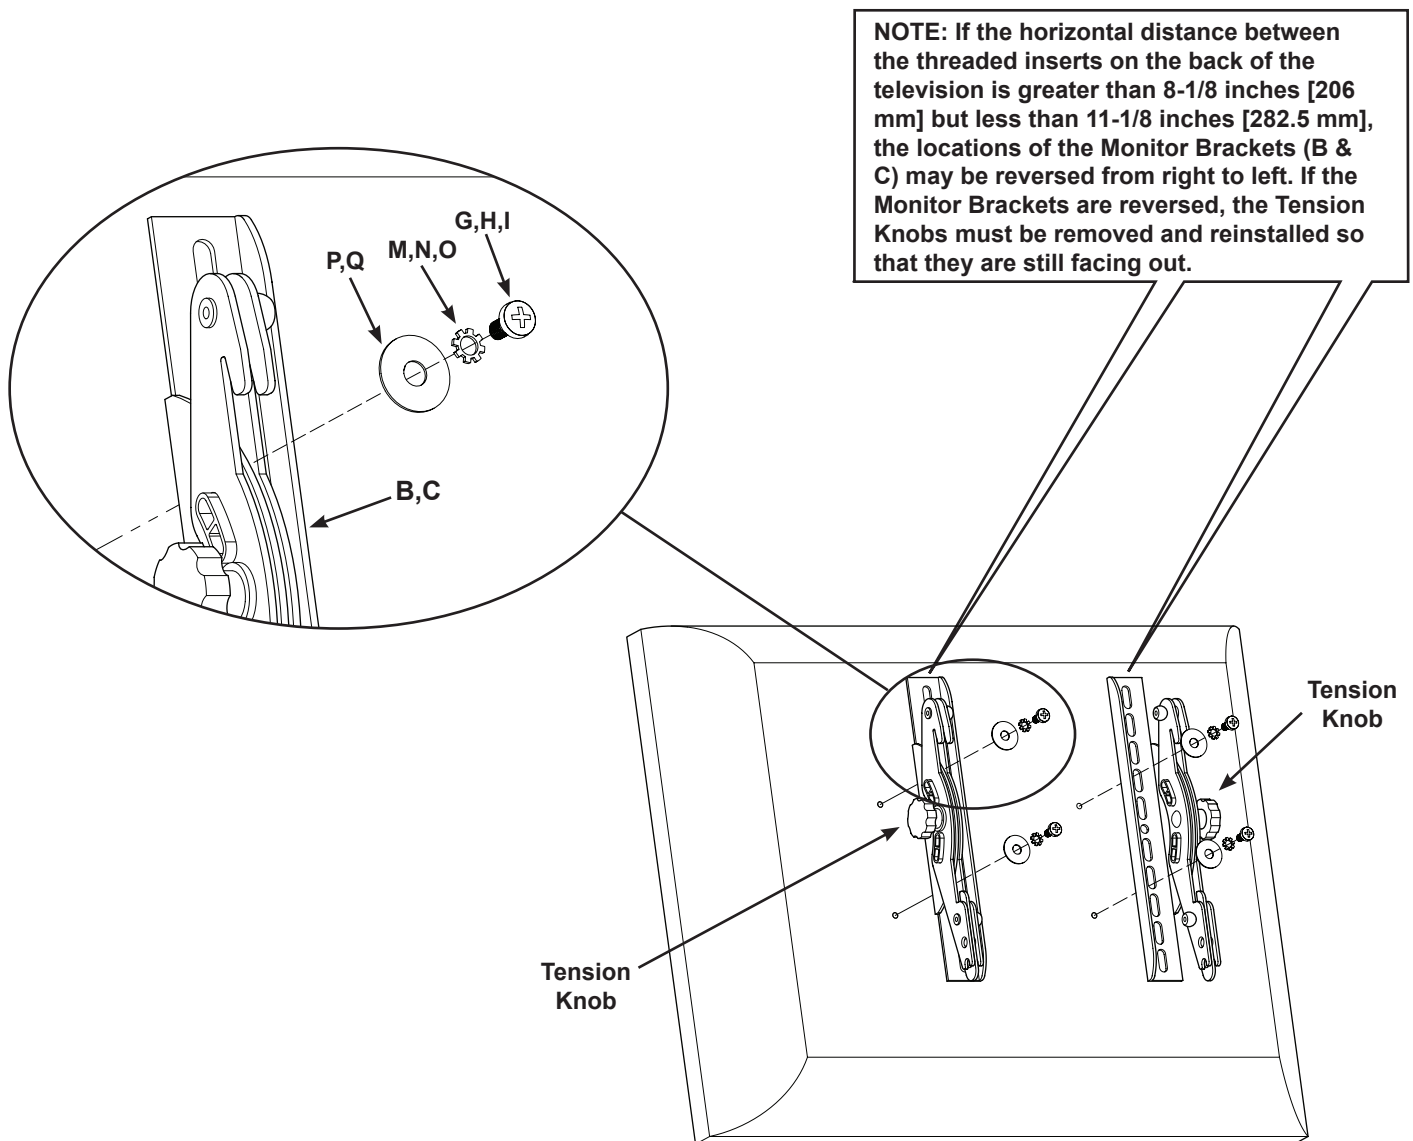

Step 2: Mount Monitor Brackets to a television with a curved back or an obstruction near the threaded insert


Determine the diameter of the Bolt (**J,K,L**) your TV requires by hand threading them into the threaded insert on the back of the TV. If you encounter any resistance stop immediately.

Once you have determined the correct diameter, see the appropriate Diagram below, thread the Bolt through the appropriate Lock Washer (**M,N,O**), the corresponding Washer (**P,Q**), the Monitor Bracket (**B,C**), a Spacer (**R,S**), and finally into the TV.


Make sure the Monitor Brackets are vertically centered and level with each other. See the appropriate Diagram below.

Tighten the Bolts (**J,K,L**) securing the Monitor Brackets (**B,C**) to the monitor.

Diagram 2

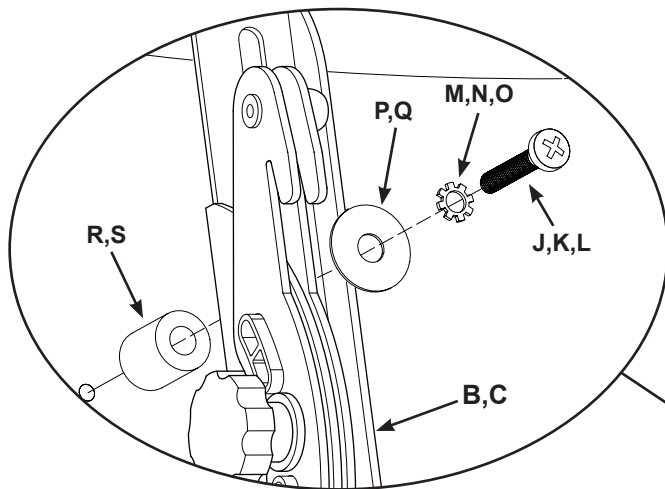

NOTE: If the horizontal distance between the threaded inserts on the back of the television is greater than 8-1/8 inches [206 mm] but less than 11-1/8 inches [282.5 mm], the locations of the Monitor Brackets (B & C) may be reversed from right to left. If the Monitor Brackets are reversed, the Tension Knobs must be removed and reinstalled so that they are still facing out.

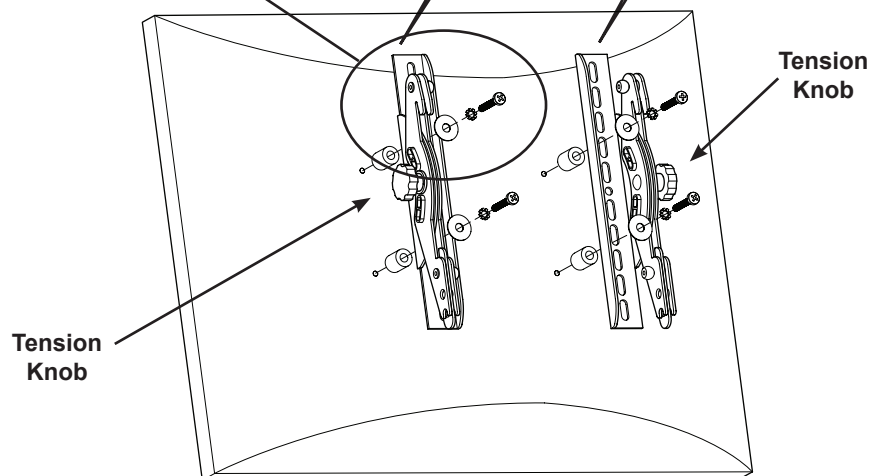

Step 3: Mounting the Wall Plate - wood stud, solid concrete and concrete block mounting options are provided

Wood Stud Installation:

▲CAUTION: Do not over tighten the Lag Bolts. Tighten Lag Bolts (D) only until the Lag Bolt Washer (E) is pulled firmly against the Wall Plate (A). If there is a layer of drywall or other material, this drywall or other material may not exceed 5/8 inch [15.8 mm] in thickness. Failure to heed this caution may result property damage and/or personal injury



Use the Wall Plate as a template mark a location on the wall, one in the top row of slots and the other in the corresponding slot in the bottom row. Pre-drill a 2.5" deep hole into the wood stud by using a 3/16" drill bit, making sure wall the Wall Plate is oriented to the flat surface is against the wall. Attach the Wall Plate to the wall using two Lag Bolts (D) and two Lag Bolt Washers (E). See Diagram 3A for assistance.

Solid concrete and concrete block installation:

Use the Wall Plate (A) as a template to mark three (3) locations on the wall. Two in the top row of slots and one more centered in the bottom row.

▲ CAUTION: Always locate Concrete Anchors (F) in the block or concrete. Never drill into the mortar between blocks. Make sure the Concrete Anchor is seated flush with the concrete surface even if there is a layer of drywall or other material. This drywall or other material may not exceed 5/8 inch [15.8 mm] in thickness. Failure to heed this caution may result property damage and/or personal injury.

Carefully pre-drill a 2.5" deep hole with a 1/2" masonry drill bit. Insert a Concrete Anchor (F) into each pre-drilled hole so it is flush with the concrete surface; then, attach the Wall Plate (A) to the wall using three Lag Bolts (D) and three Lag Bolt Washers (E). See Diagram 3B for assistance.

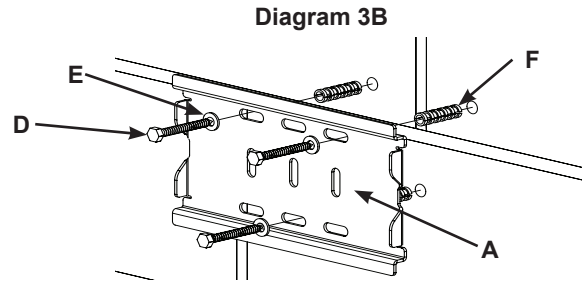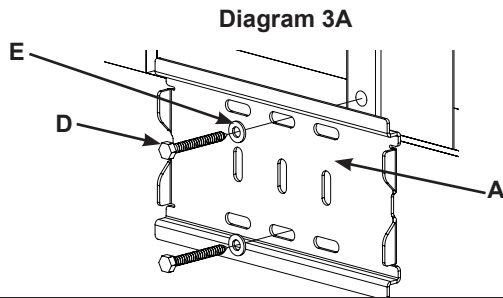

Step 4: Attach Monitor to Wall Plate

▲CAUTION: Some televisions may require two people to lift. CSAV is not responsible for personal injury or product damage.

Rotate the Latch Handle into its most open position and hang the hooks of the Left and Right Monitor Brackets (B,C) over the tab on the top of the Wall Plate (A) as shown in Diagram 4A.

Once the Monitor Brackets (B,C) are attached to the Wall Plate, rotate the Latch Handles on each Monitor Bracket until they click into place. The tip of the Latch Handle should now be tucked up behind the tab on the bottom of the Wall Plate as shown in the detailed view of Diagram 4B.

